

ICS 65.060.99  
CCS

|     |       |    |
|-----|-------|----|
|     | ..... | 11 |
| 1   | ..... | 1  |
| 2   | ..... | 1  |
| 3   | ..... | 1  |
| 4   | ..... | 2  |
| 5   | ..... | 2  |
| 6   | ..... | 2  |
| 6.1 | ..... | 2  |
| 6.2 | ..... | 2  |
| 6.3 | ..... | 2  |
| 6.4 | ..... | 2  |
| 7   | ..... | 3  |
| 7.1 | ..... | 3  |
| 7.2 | ..... | 3  |
| 7.3 | ..... | 3  |
| 7.4 | ..... | 5  |
| 8   | ..... | 5  |
| 8.1 | ..... | 5  |
| 8.2 | ..... | 5  |
| 8.3 | ..... | 5  |
| 8.4 | ..... | 6  |
| 9   | ..... | 6  |
| 9.1 | ..... | 6  |
| 9.2 | ..... | 6  |
| 9.3 | ..... | 6  |
| 9.4 | ..... | 6  |
| A   | ..... | 7  |
| A.1 | ..... | 7  |
| A.2 | ..... | 7  |

GB/T 1.1—2020

1

1

2

3.7 carryover ratio

3.8 executing unit

,

4

/ , , ,

5

5.1 A

5.2 ,

6

6.1

6.1.1

6.1.2 ,

6.1.3 ,

6.1.4 ,

6.1.5 80 μ m, GB/T 37400.12-2019

6.1.6 GB5226.1

6.1.7 GB/T9969

6.2

6.2.1 , ; 80dB(A)

6.2.2 ,

6.3

6.3.1 30kg/h

6.3.2 1

1

|   |      |     |
|---|------|-----|
|   |      |     |
| 1 | ≤ /% | 1   |
| 2 | /% ≥ | 99  |
| 3 | ≤    | 3:1 |
| 4 | ≤    | 1:3 |

6.4

6.4.1

1MΩ

6.4.2

, 1000V ,

6.4.3

1.5mm<sup>2</sup>

GB 5226.1

6.4.4

GB16798

6.4.5

GB 10395.1

6.4.6

GB 10396

6.4.7

a)

ř

$\beta$  ——— %  
1 ——— g  
2 ——— g

7.3.2

7.3.1  $\beta$  , 0.5h ,  
1 , 0.5h, (2)  
( , , )  
$$= \frac{3}{\times} \dots\dots\dots (2)$$

$q$  ——— kg/h  
3 ——— kg  
T ——— (h)  
N ———

7.3.3 /

7.3.3.1 /

7.3.1  $\beta$  , 0.5h ,  
2min , 1000g  
/ , 0.01g , (3)  
/  
$$= \frac{3}{4} \times 100\%$$

$$2 = \frac{9}{10} \cdots \cdots (6)$$

1\_\_\_\_\_ \$

8.4

8.4.1

6

8.4.2

,

9

9.1

9.1.1

,

GB/T 13306

9.1.2

GB/T 191

9.2

9.2.1

GB/T 24854

9.2.2

\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

9.3

9.3.1

9.3.2

9.3.3

9.4

9.4.1

,


9.4.2

A

A.1

,

A.2

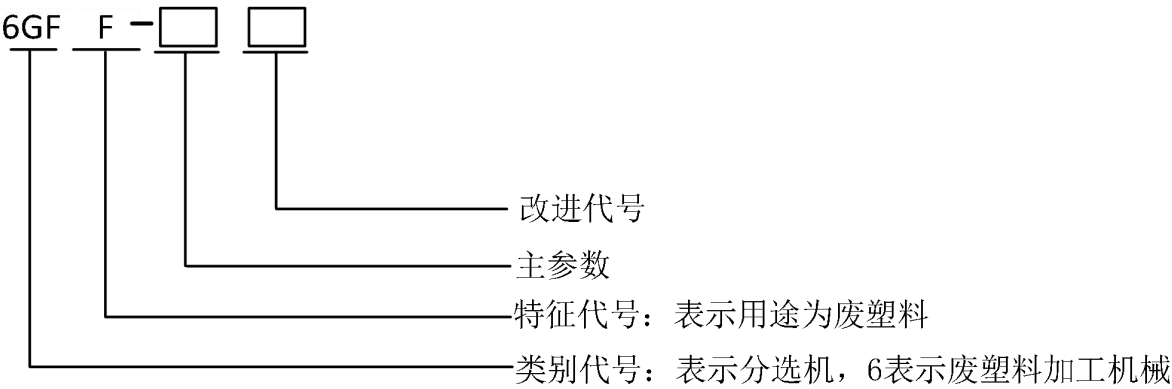

1 7GFF-240A 240